


HY-FPC Φ8 NTAG213

Product introduction

RFIDHY Technology has posted Flexible NFC tags is a high temperature resistant flexible printed circuit (FPC) RFID inlay. FPC tag is a flexible rfid tag, which can also be easily applied to curved surfaces.

Its high temperature resistance, flexible, etc performance is widely used for smart wearable equipment, luxury item tracking management, industrial laundry purpose with high temperature resistant requestment.

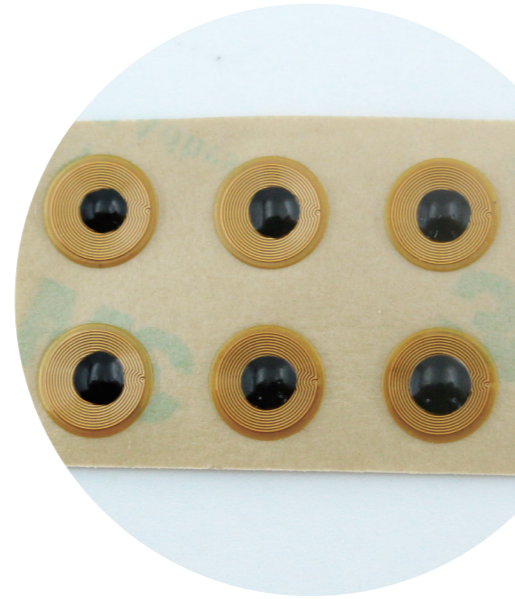

Applications



Product introduction

Operational Frequency	13.56 MHz
Interface Protocol	ISO14443A
Chip Type	Ntag 213
Memory Configuration	144Byte
Data Retention	10 Years
Write Cycle Endurance	100,000 cycles

Products Characteristics

Label size	Φ8mm
Reading Range	27mm
Material	FPC
Packaging	500pcs/bag
Application	Smart wearable equipment,luxury item tracking management,industrial laundry

Environmental Specifications

Operating Temperature	-25 ~ +85 °C
Storage Temperature	-25 ~ +65 °C

Personalization

- 1 Customized specific encoding
- 2 Customized printing of logo, text, barcode etc

Drawing of Product

