


HY-MOΦ3 UHF micro Tag

Product introduction

This 3mm diameter RFID ultra-micro embedded tag is a micro radio frequency identification tag widely used in many fields. Suitable for tracking and management of small tools, industrial products, electronic equipment and other items.

Its tiny size and solid packaging make it easy to be embedded in various complex environments. Whether it is small mechanical parts, electronic components or high-precision instruments, it can realize unique identification and automatic management through this label.

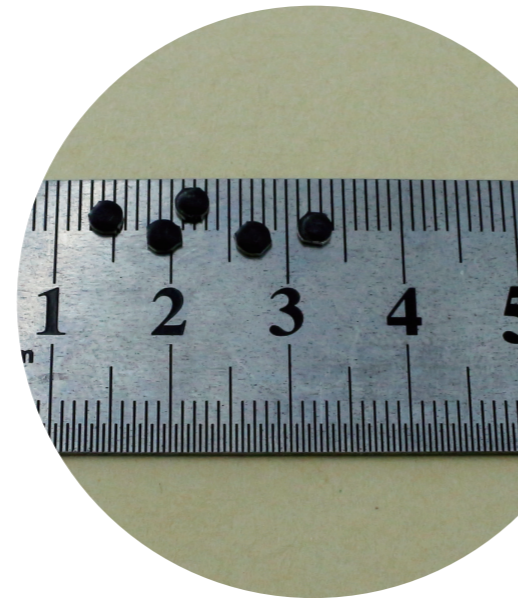

Applications



Product introduction

Operational Frequency	US 902-928MHz
Protocol	EPC Class1 Gen2, IS018000-6C
Chip Type	M730
Memory	128-bits EPC ;96-bits TID ;0 bit user memory
Data Retention	10 Years
Write Cycle Endurance	100,000 cycles

Products Characteristics

Dimension	Φ3.0mm
Reading Range	>30mm
Material	Epoxy PCB
Packaging	100PCS/BAG
Characteristics	Wear resistance, corrosion resistance, aging resistance, bite resistance.

Environmental Specifications

Operating Temperature	-197 ~ +230°C
Storage Temperature	-40 ~ +120°C

Personalization

- 1 Customized specific encoding
- 2 Customized printing of logo, text, barcode etc

Drawing of Product

