


HY-RL7030-2 Ultra-Thin UHF Flexible on-metal label

Product introduction

With ultra-thin flexible design, The thickness of UHF flexible on-metal label is only 0.6mm.

It is suitable for both plain surface and curved surface, supports printing, encoding, and other personalized customization services.

The RFID label is widely used for metal containers management, IT assets, warehouse management, etc

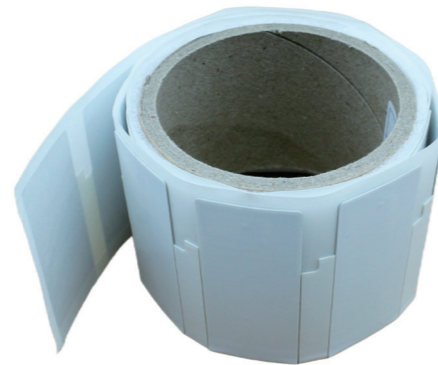

Applications



Product introduction

Operational Frequency	902-928MHz
Protocol	EPC C1G2 (ISO18000-6C)
Chip Type	Impinj R6-P
Memory	EPC 128bits, USER 32bits
Data Retention	10 Years
Write Cycle Endurance	100,000 cycles

Products Characteristics

Dimension	70x30x0.6mm
Weight	1.4g
Reading Range	6.5m
Material	PET
Packaging	500PCS/Roll
Application	Metal container tracking, equipment management, warehouse shelves, IT asset management.

Environmental Specifications

Operating Temperature	-40~ +85°C
Storage Temperature	-40~+120°C

Personalization

- 1 Customized specific encoding
- 2 Customized printing of logo, text, barcode etc

Drawing of Product

